



1.	1
2	4
3	10
4	14
5	16
5. 1. USB	16
5. 2 LAN	17
5. 3 RS- 232C	18
5. 4. IEEE1284	19

1.

BNP

TrueType




CD-ROM

TrueType

[Empty box]

[Empty box]

[Empty box]



32 255

[Empty box]

[Empty box]

[Empty box]

1dot
) SG408R(203dpi) 0.125nm/1dot
SG412R(305dpi) 0.083nm/1dot
SG424R(609dpi) 0.041nm/1dot

[Empty box]

[Empty box]

[Empty box]



832

851, 968

(O)

(M)



SG412R(305dpi 0.083mm/dot

10 1

262

—

10

262

x 10

2620



1

72

1

1

0.3514mm

10

10

x 0.3514 mm

3.514mm

305dpi 12 nm

3.514mm ÷ 0.083mm 42.3

42dot

42dot

9.92

1


42dot ÷ 8 5.25

42dot

6 x 42 252

10

262

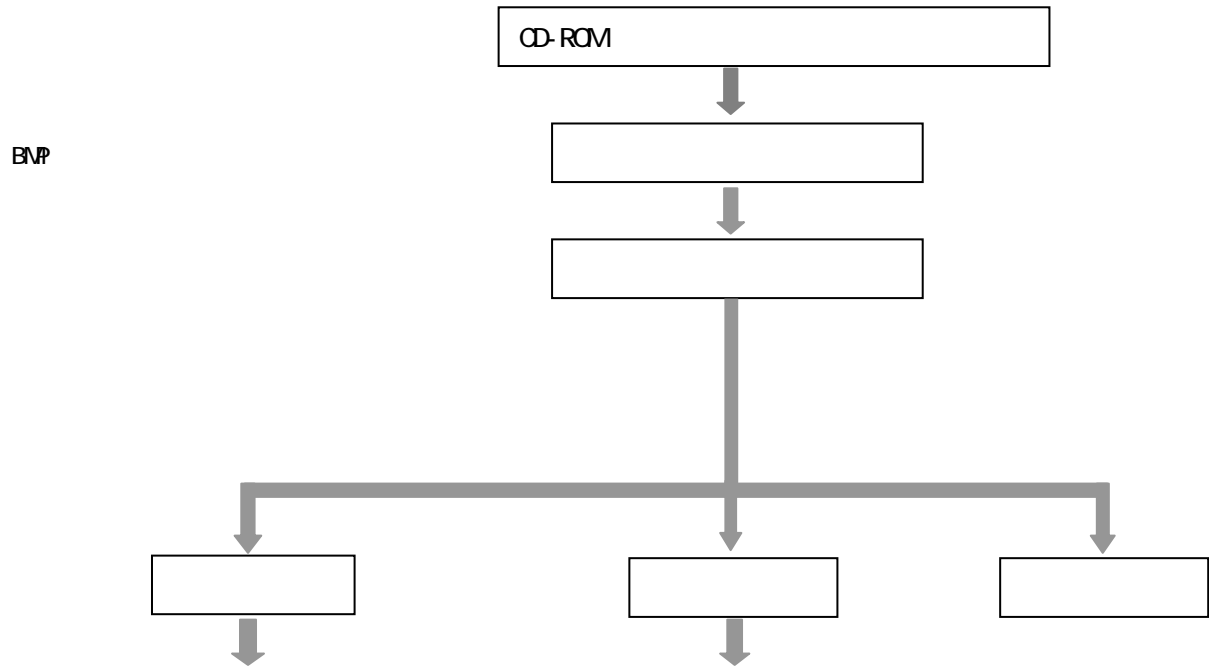

ENP



DLF



832

851, 968

(M)

(O)

